



AREA E - GROCER LOADING AREA
MASONRY REINF. DETAILS - PLAN
 Scale - 1/4"=1'-0"
 REF: S2.01e, A2.01e, S4.20

AREA E - STAIR D
MASONRY REINF. DETAILS - PLAN
 Scale - 1/4"=1'-0"
 REF: S2.01e, A2.01e, S4.20 & A7.05

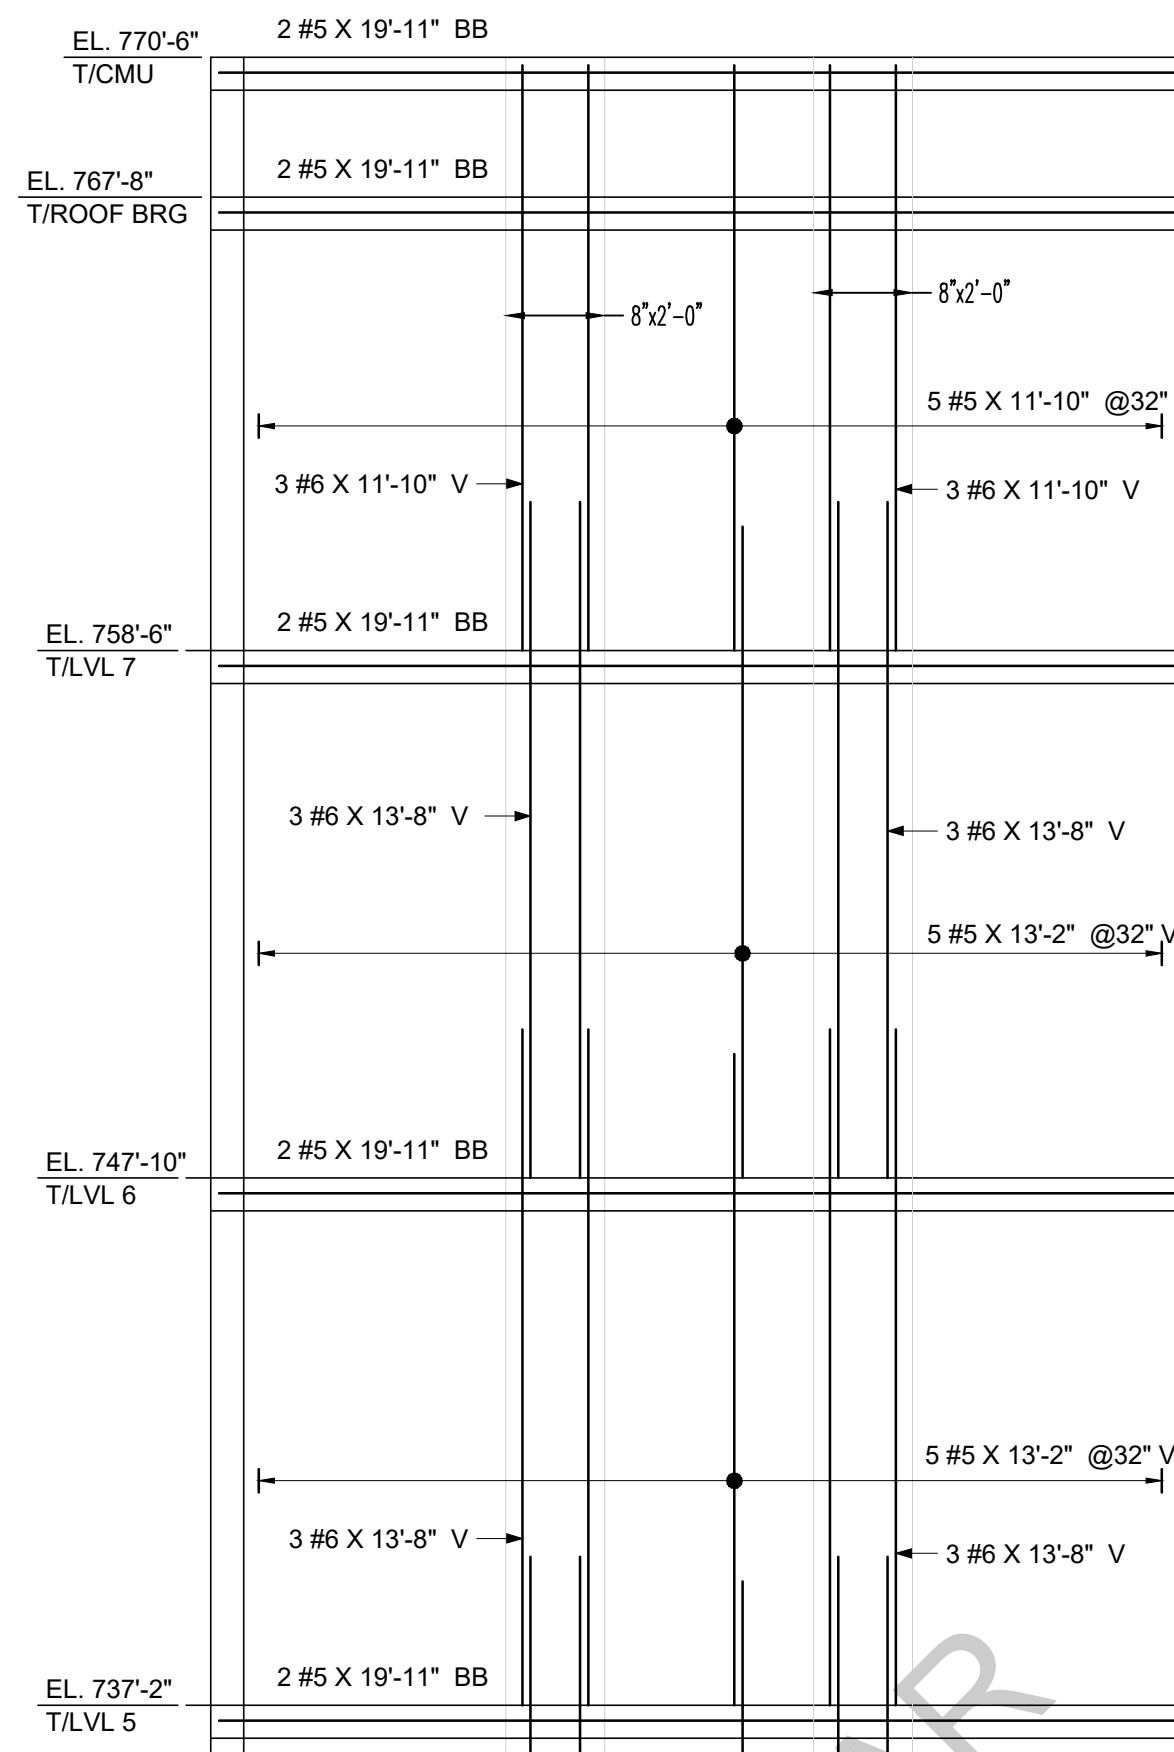


ELEVATION B
 SCALE: 1/4" = 1'-0"
 REF: S2.01e, A2.01e, S4.20 & A7.05

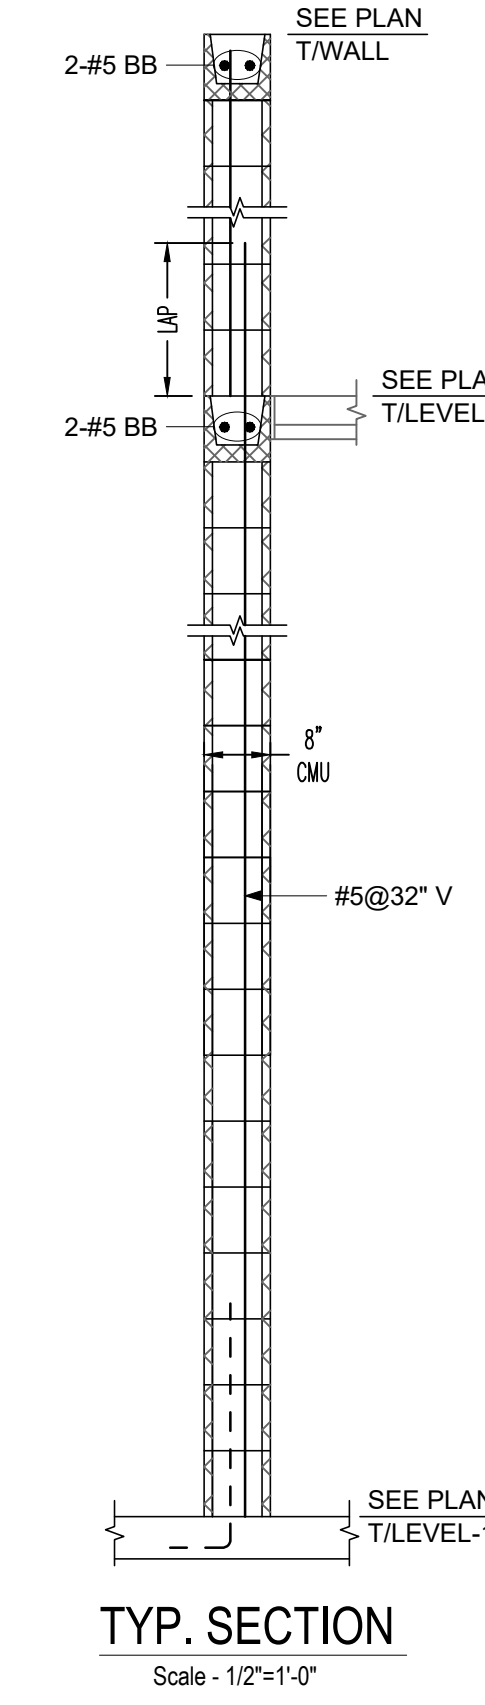


TYP. SECTION
 Scale - 1/2"=1'-0"


TYPICAL BOND BEAM CORNER DETAILS
 SCALE: 1/2" = 1'-0"
 REF: S4.20

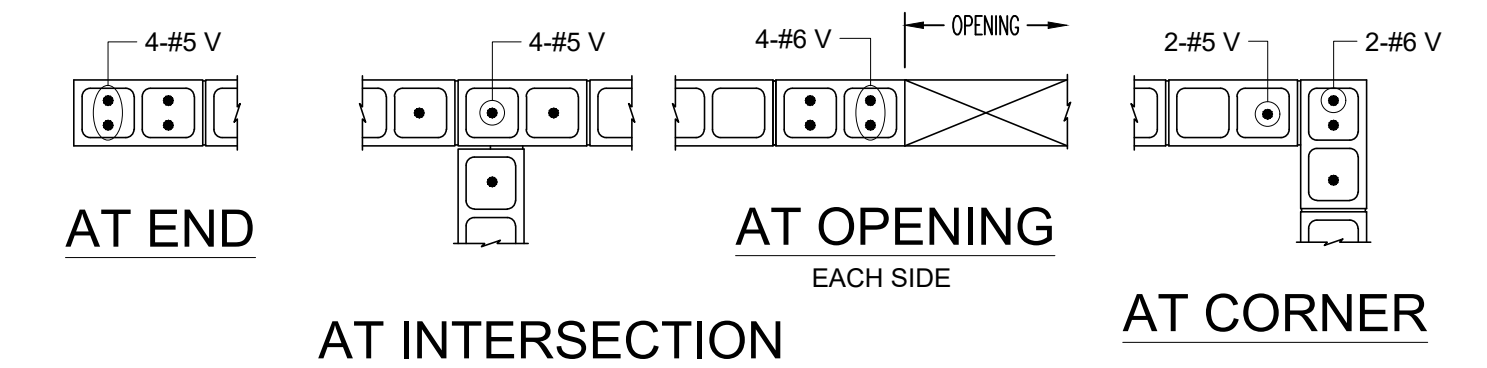


MASONRY REINFORCEMENT ARRANGEMENT
 SCALE: 1/2"=1'-0"

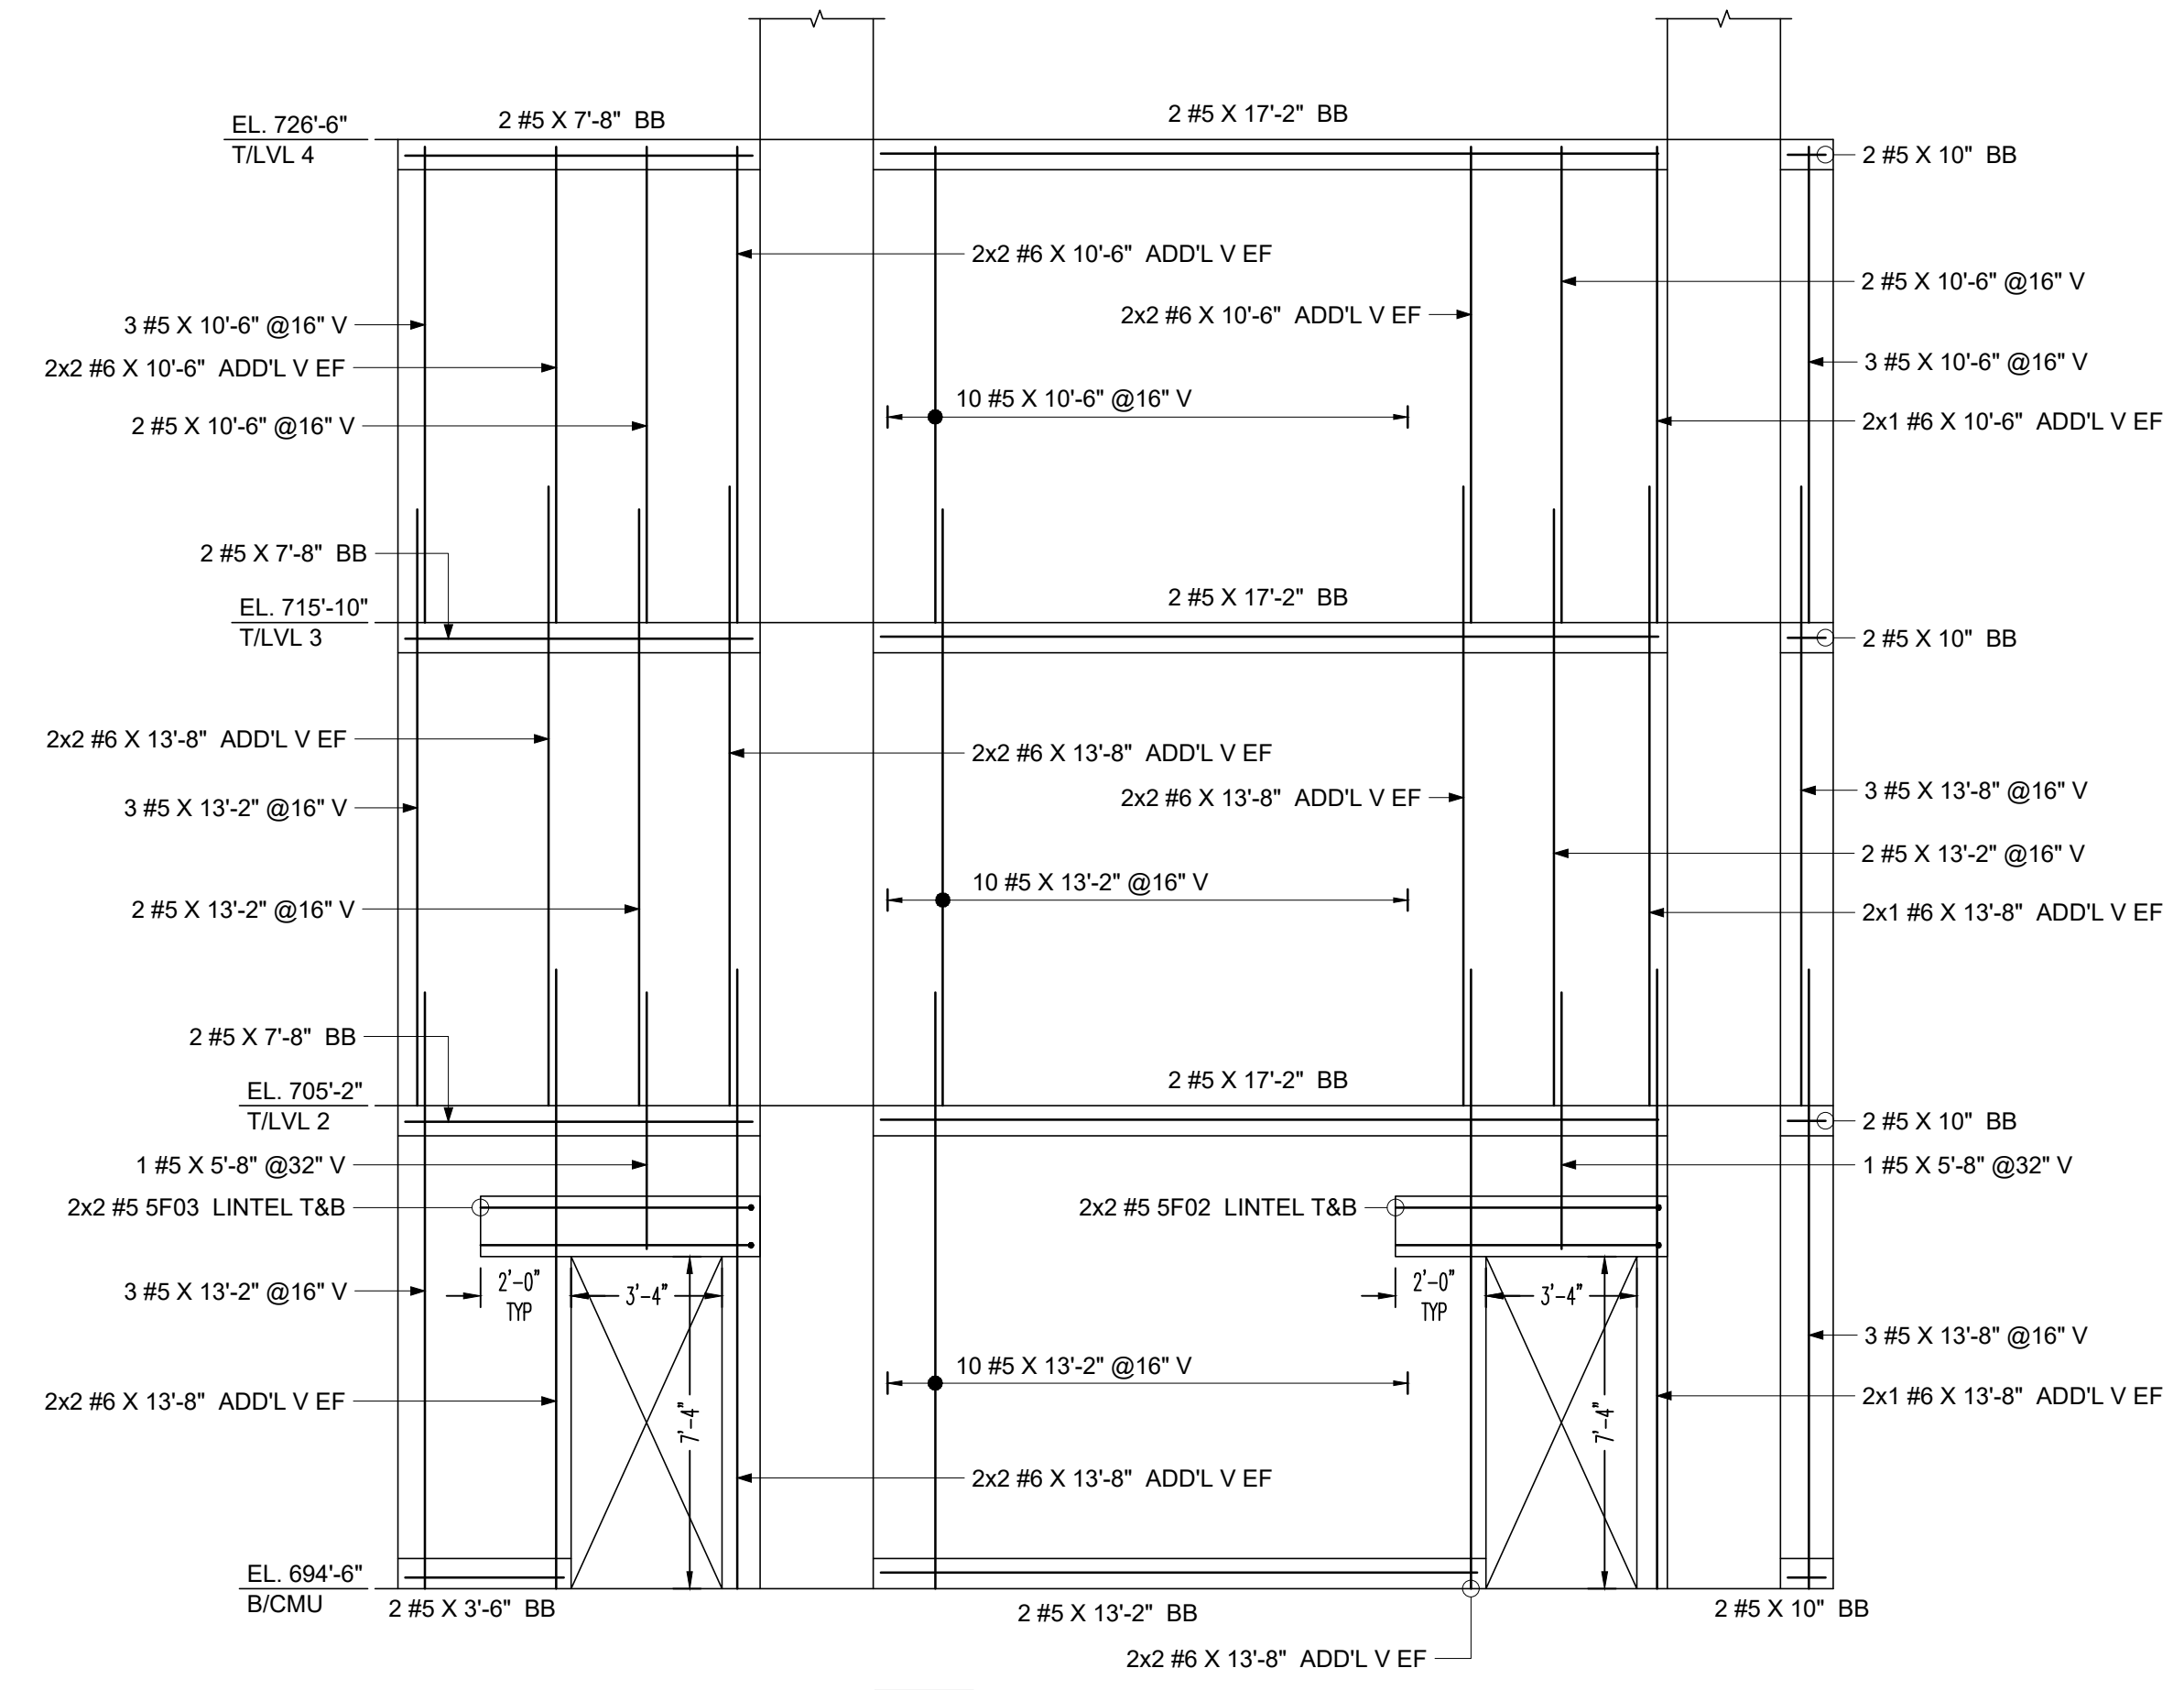

ELEVATION A
 SCALE: 1/4" = 1'-0"
 REF: S2.01e, A2.01e, S4.20 & A7.05

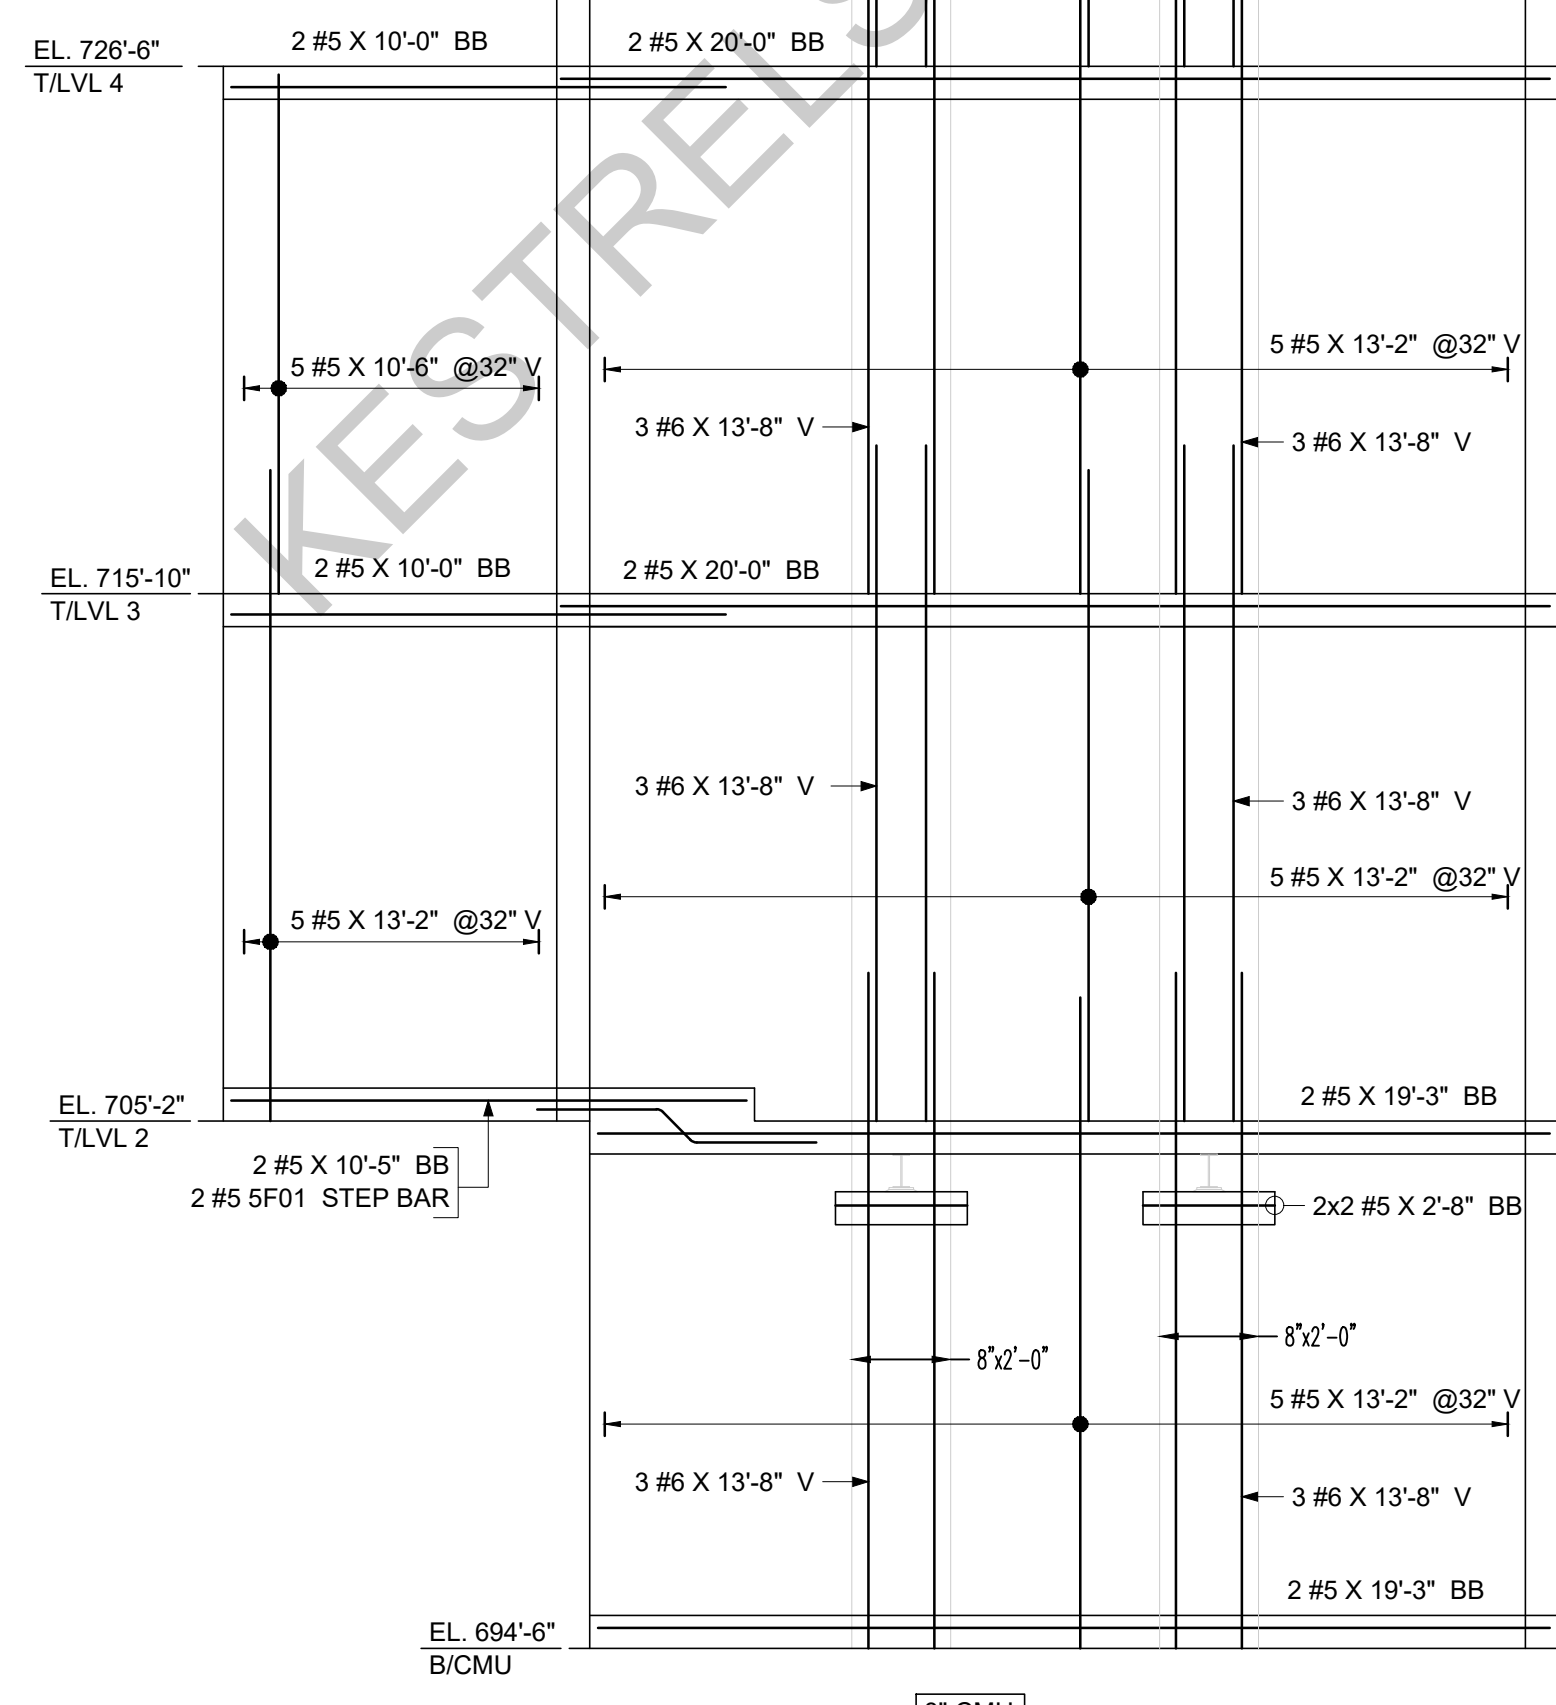

ELEVATION B
 SCALE: 1/4" = 1'-0"
 REF: S2.01e, A2.01e, S4.20 & A7.05

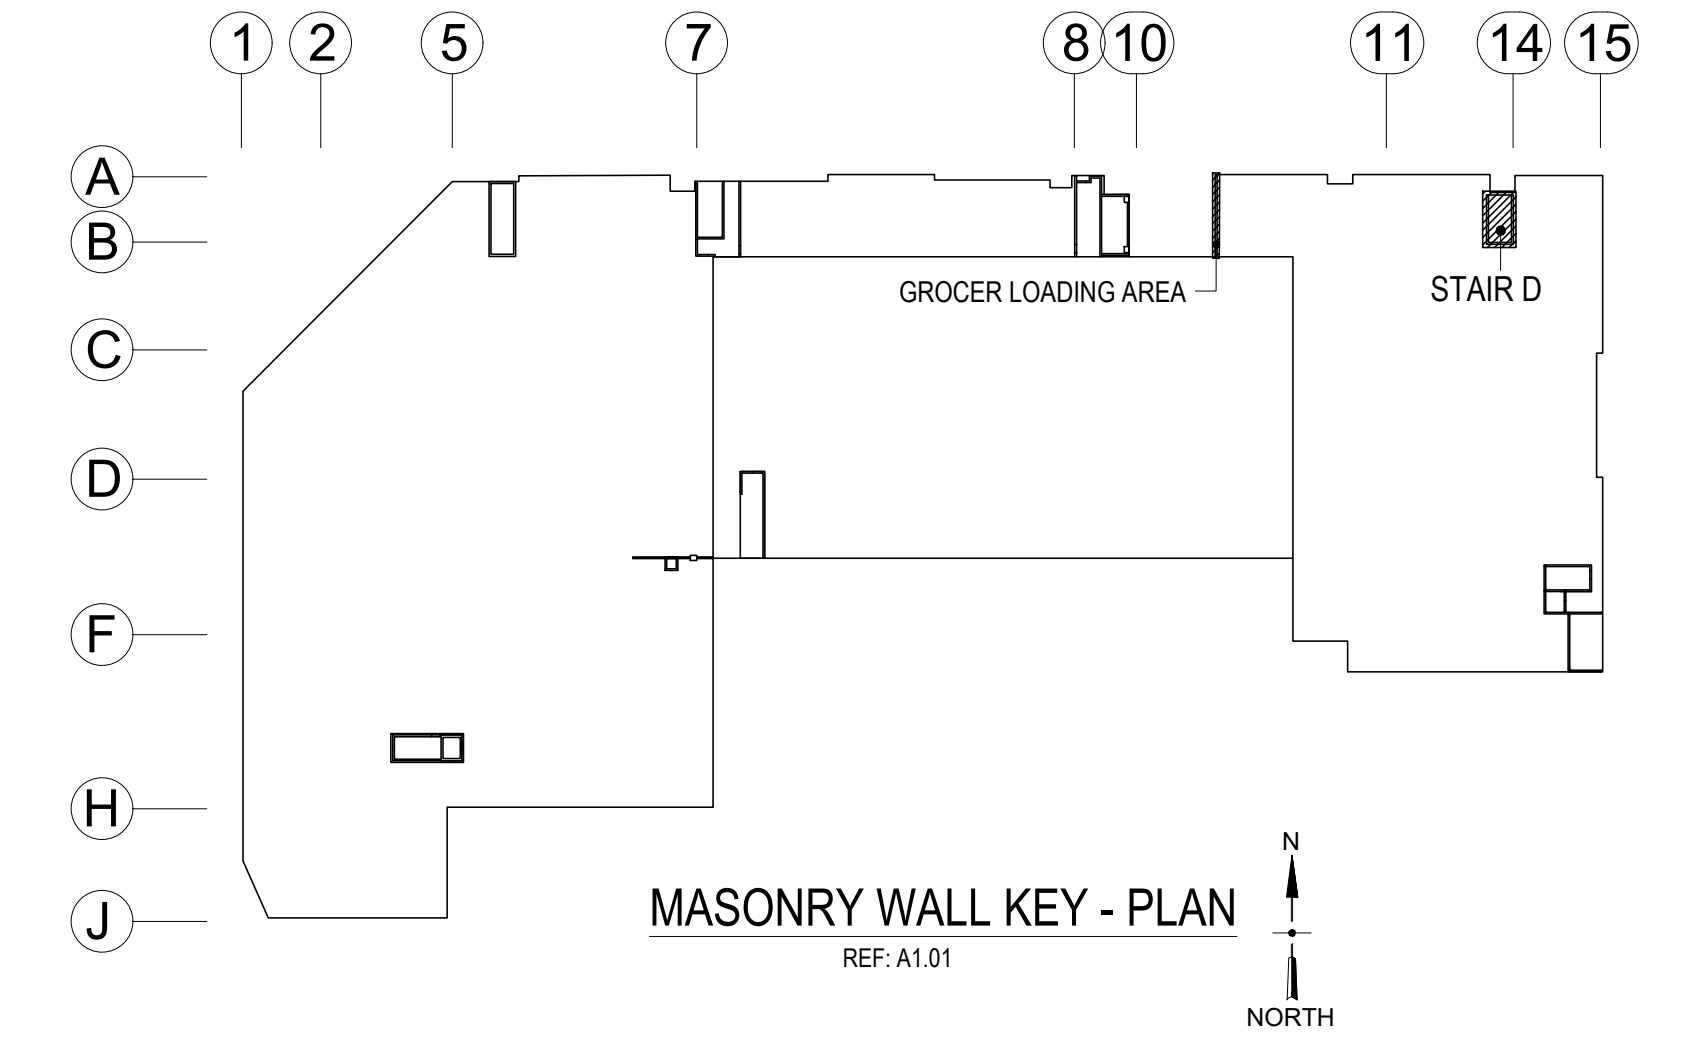

MASONRY WALL KEY - PLAN
 REF: A1.01



LAP SCHEDULE FOR MASONRY	
48 DIA BAR	
SIZE	LENGTH
#3	1'-6"
#4	2'-0"
#5	2'-6"
#6	3'-0"
#7	3'-6"
#8	4'-0"
#9	4'-7"
#10	5'-1"
#11	5'-8"

ABBREVIATIONS	
CORNER BAR	COR.
ADDITIONAL	ADD'L
EACH SIDE	ES
CONTINUOUS	CONT.
VERTICAL	V
BOND BEAM	BB
TOP OF SLAB	T.O.S

- NOTES:-**
- TYPICAL CLEARANCES
 CMU
 A) TOP - 2"
 B) END - 2"
 - PROVIDE FIELD CUT AS REQUIRED LOCATIONS
 - BAR TO BE PLACED AT EQUAL SPACING U.O.N.
 - TILT HOOK TO ACCOMMODATE THE COVER, IF NEEDED


ALL BARS ARE ASTM A615 GRADE 60 BLACK

Bar Mark	Qty	Size	Total Length	Type	'A'	'B'	'C'	'D'	'E'	'F'	'G'	'H'	'I'	'J'	'K'	'L'	'M'
5F01	2	#5	5'-11 1/2"	3				2'-6"									
5F02	4	#5	6'-8"	2	0'-10"	5'-10"											
5F03	4	#5	6'-10"	2	0'-10"	6'-0"											
5F04	78	#5	5'-0"	17				2'-6"									
5F05	2	#5	4'-4"	17				1'-10"	2'-6"								
5F06	4	#5	7'-0"	2	0'-10"	6'-2"											
5F07	12	#5	7'-4"	2	0'-10"	6'-6"											
5F08	4	#5	7'-5"	2	0'-10"	6'-7"											

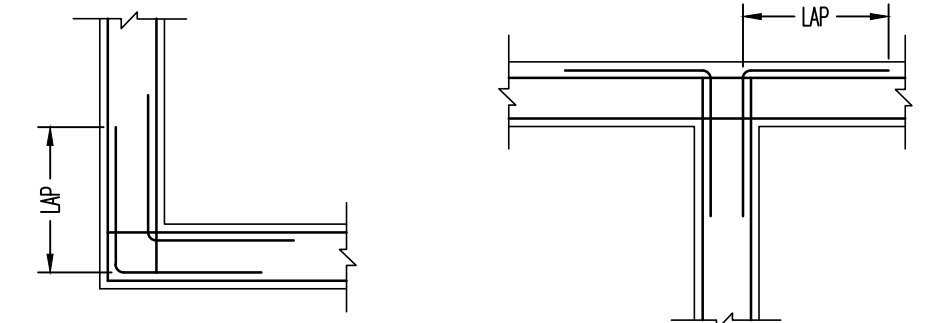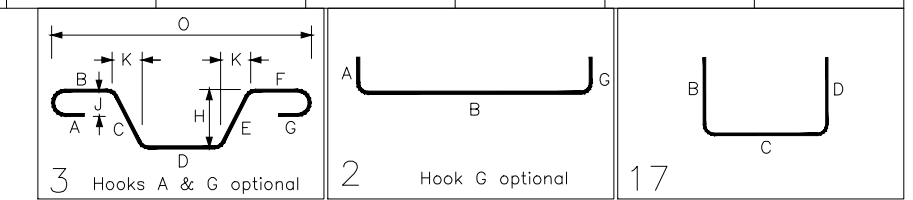


TYPICAL BOND BEAM CORNER DETAILS

SCALE: 1/2" = 1'-0"
REF: S4.20

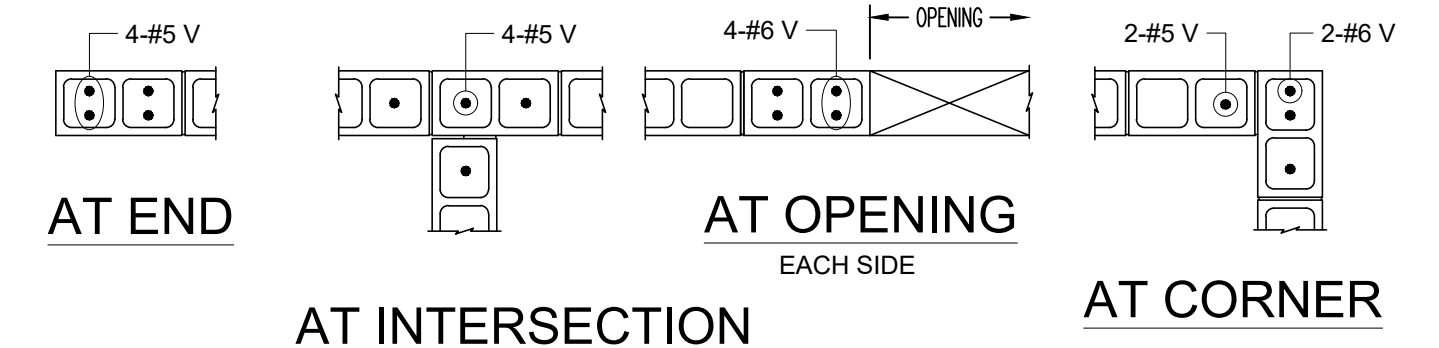

MASONRY REINFORCEMENT ARRANGEMENT

SCALE: 1/2" = 1'-0"

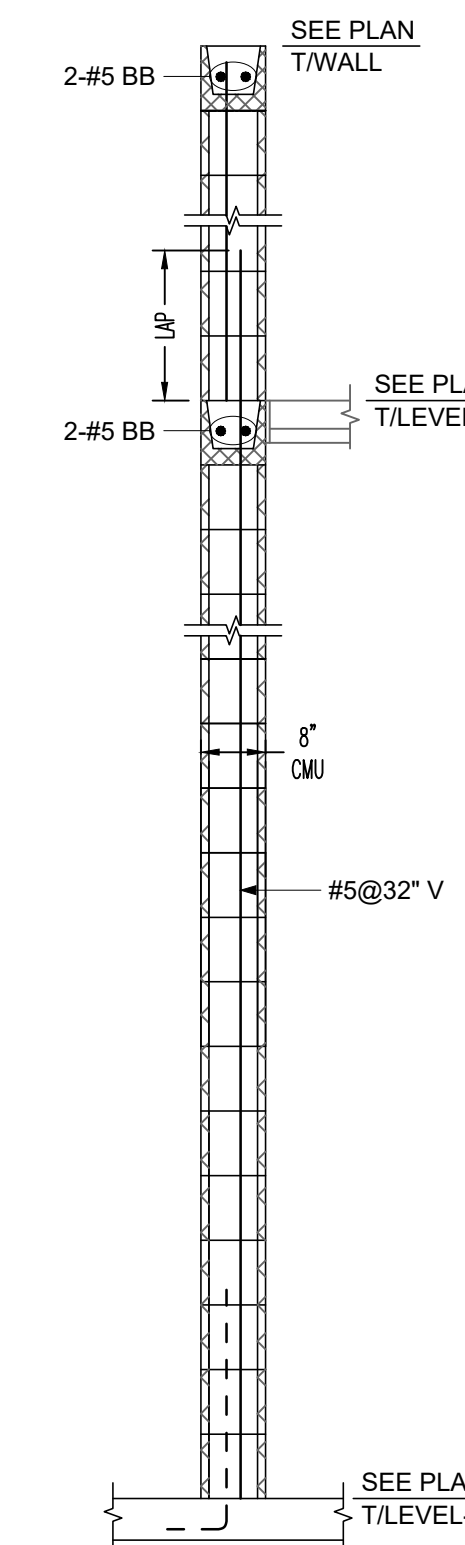


TYP. SECTION
Scale: 1/2" = 1'-0"

SIZE	LENGTH
#3	1'-6"
#4	2'-0"
#5	2'-6"
#6	3'-0"
#7	3'-6"
#8	4'-0"
#9	4'-7"
#10	5'-1"
#11	5'-8"


ABBREVIATIONS	
CORNER BAR	COR.
ADDITIONAL	ADD'L
EACH SIDE	ES
CONTINUOUS	CONT.
VERTICAL	V
BOND BEAM	BB
TOP OF SLAB	T.O.S

- NOTES:-**
- TYPICAL CLEARANCES
CMU
A) TOP - 2"
B) END - 2"
 - PROVIDE FIELD CUT AS REQUIRED LOCATIONS
 - BARS TO BE PLACED AT EQUAL SPACING U.O.N.
 - TLT HOOK TO ACCOMMODATE THE COVER, IF NEEDED


ALL BARS ARE ASTM A615 GRADE 60 BLACK

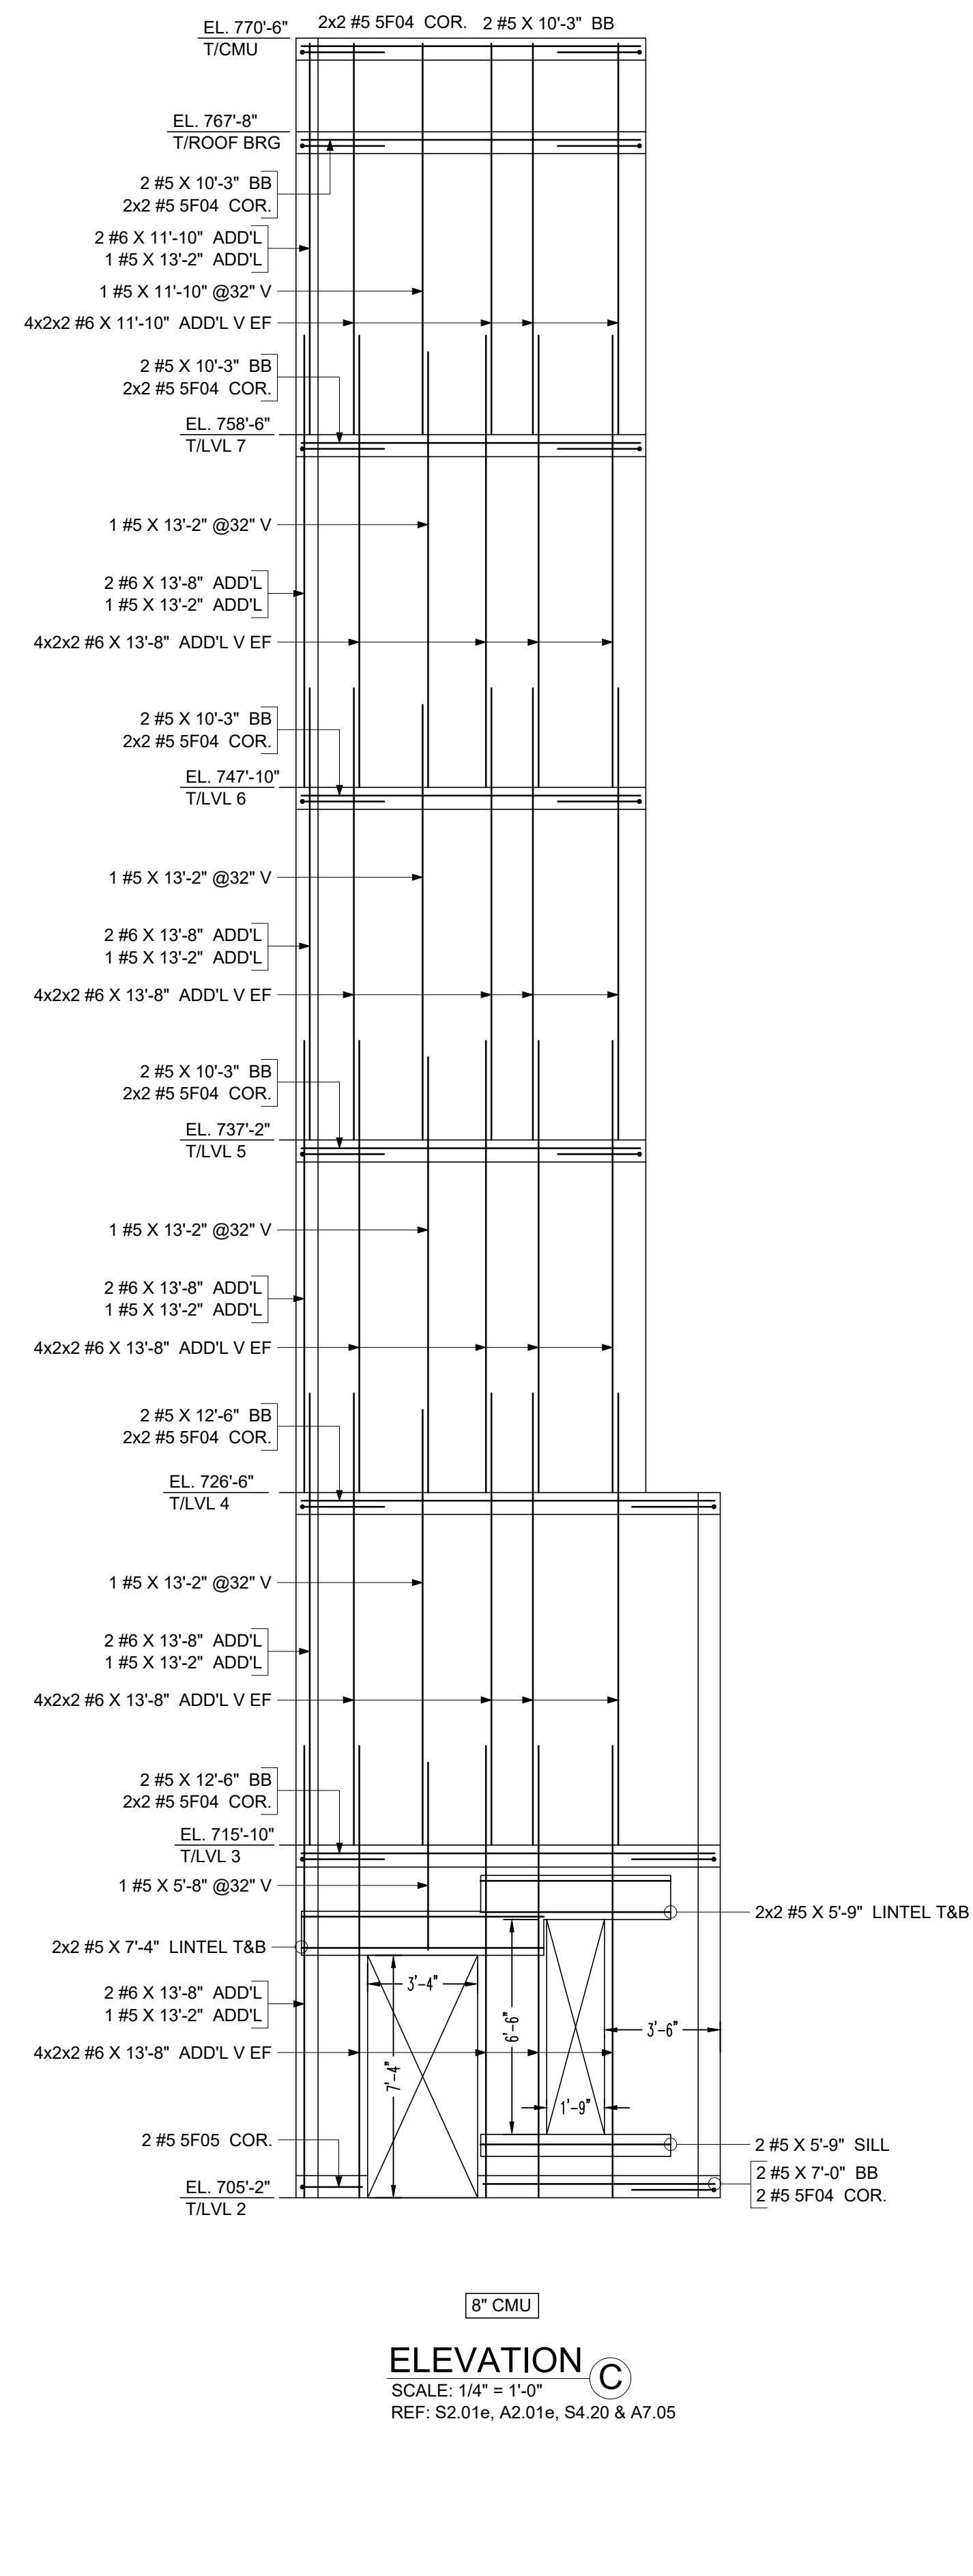

ELEVATION C
SCALE: 1/4" = 1'-0"
REF: S2.01e, A2.01e, S4.20 & A7.05

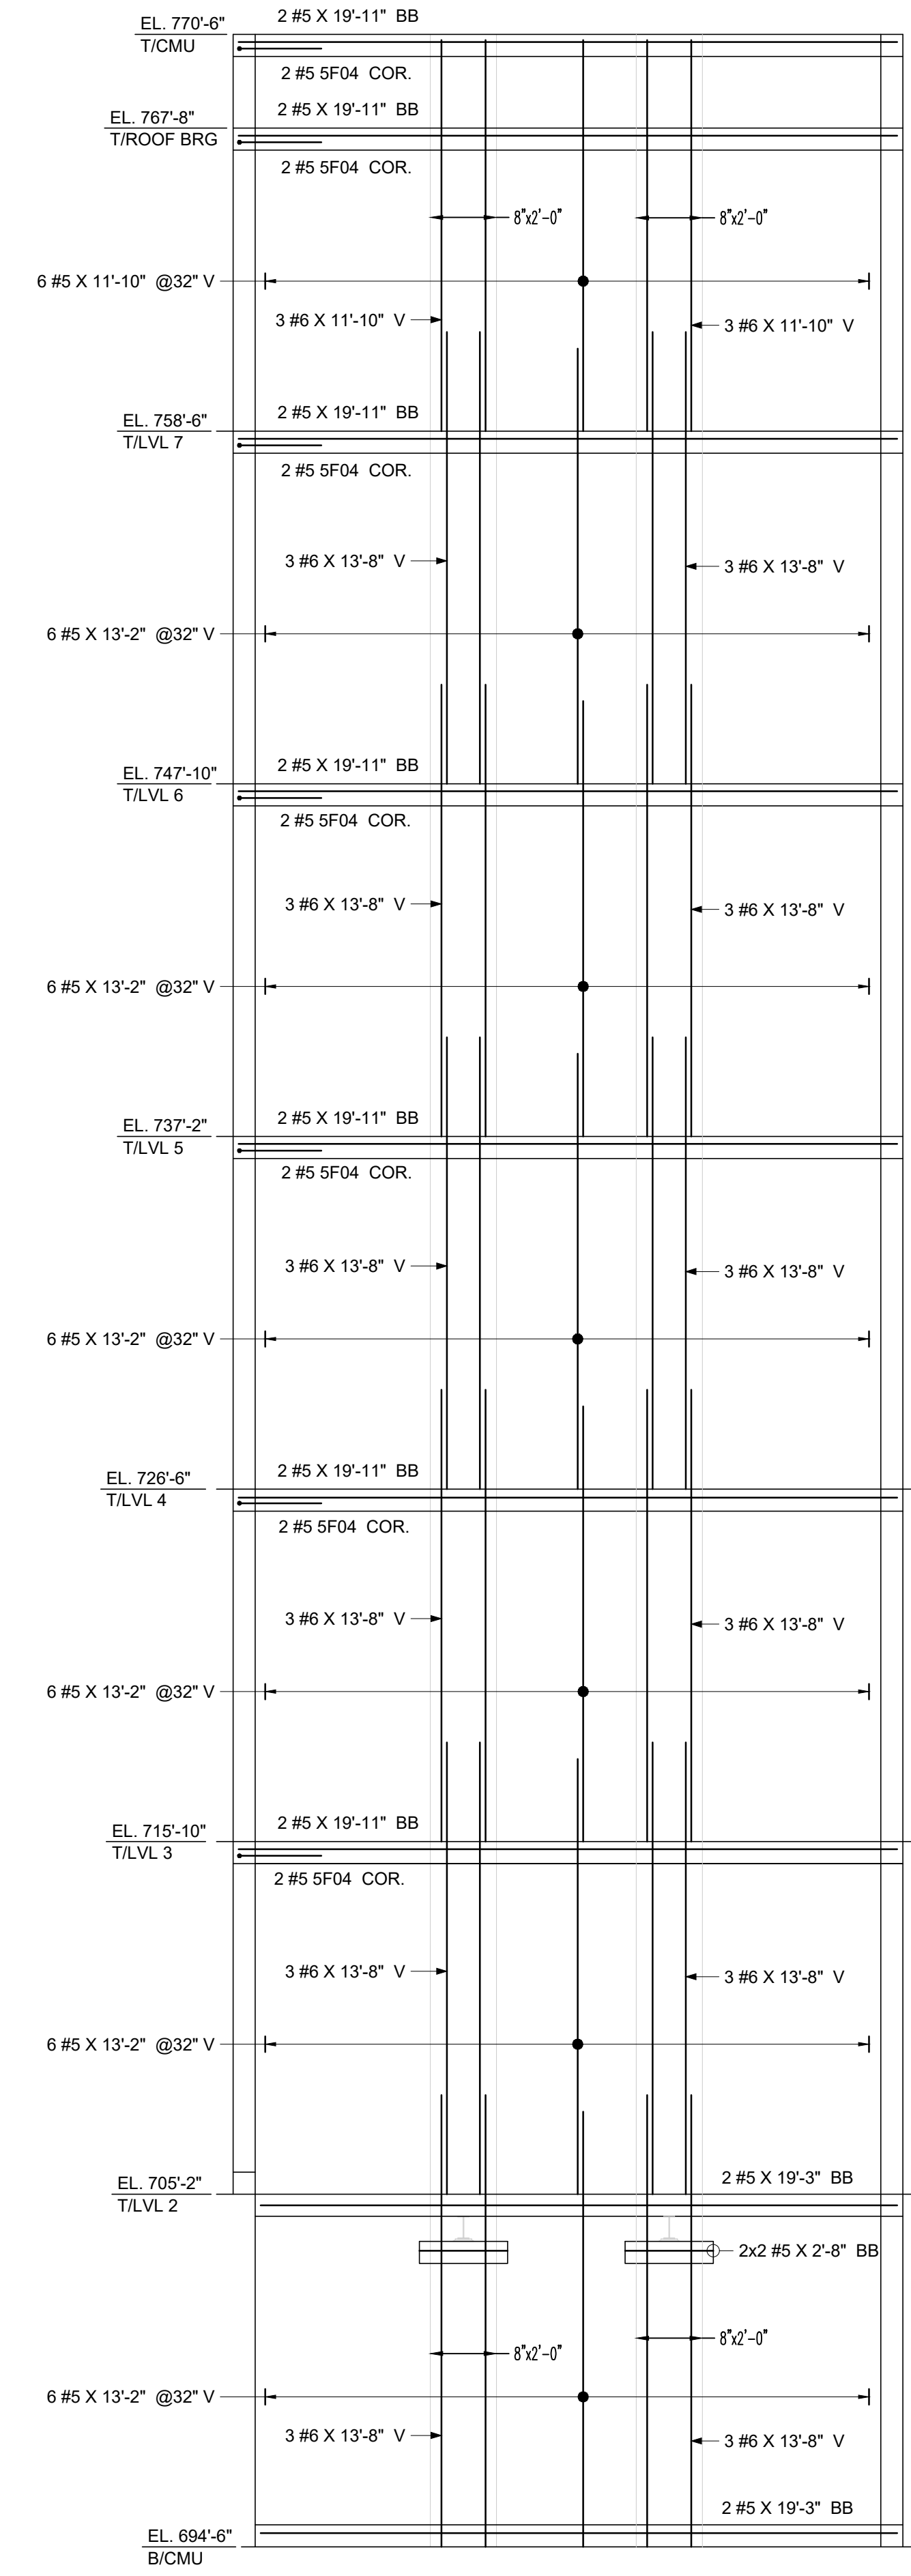

ELEVATION D
SCALE: 1/4" = 1'-0"
REF: S2.01e, A2.01e, S4.20 & A7.05

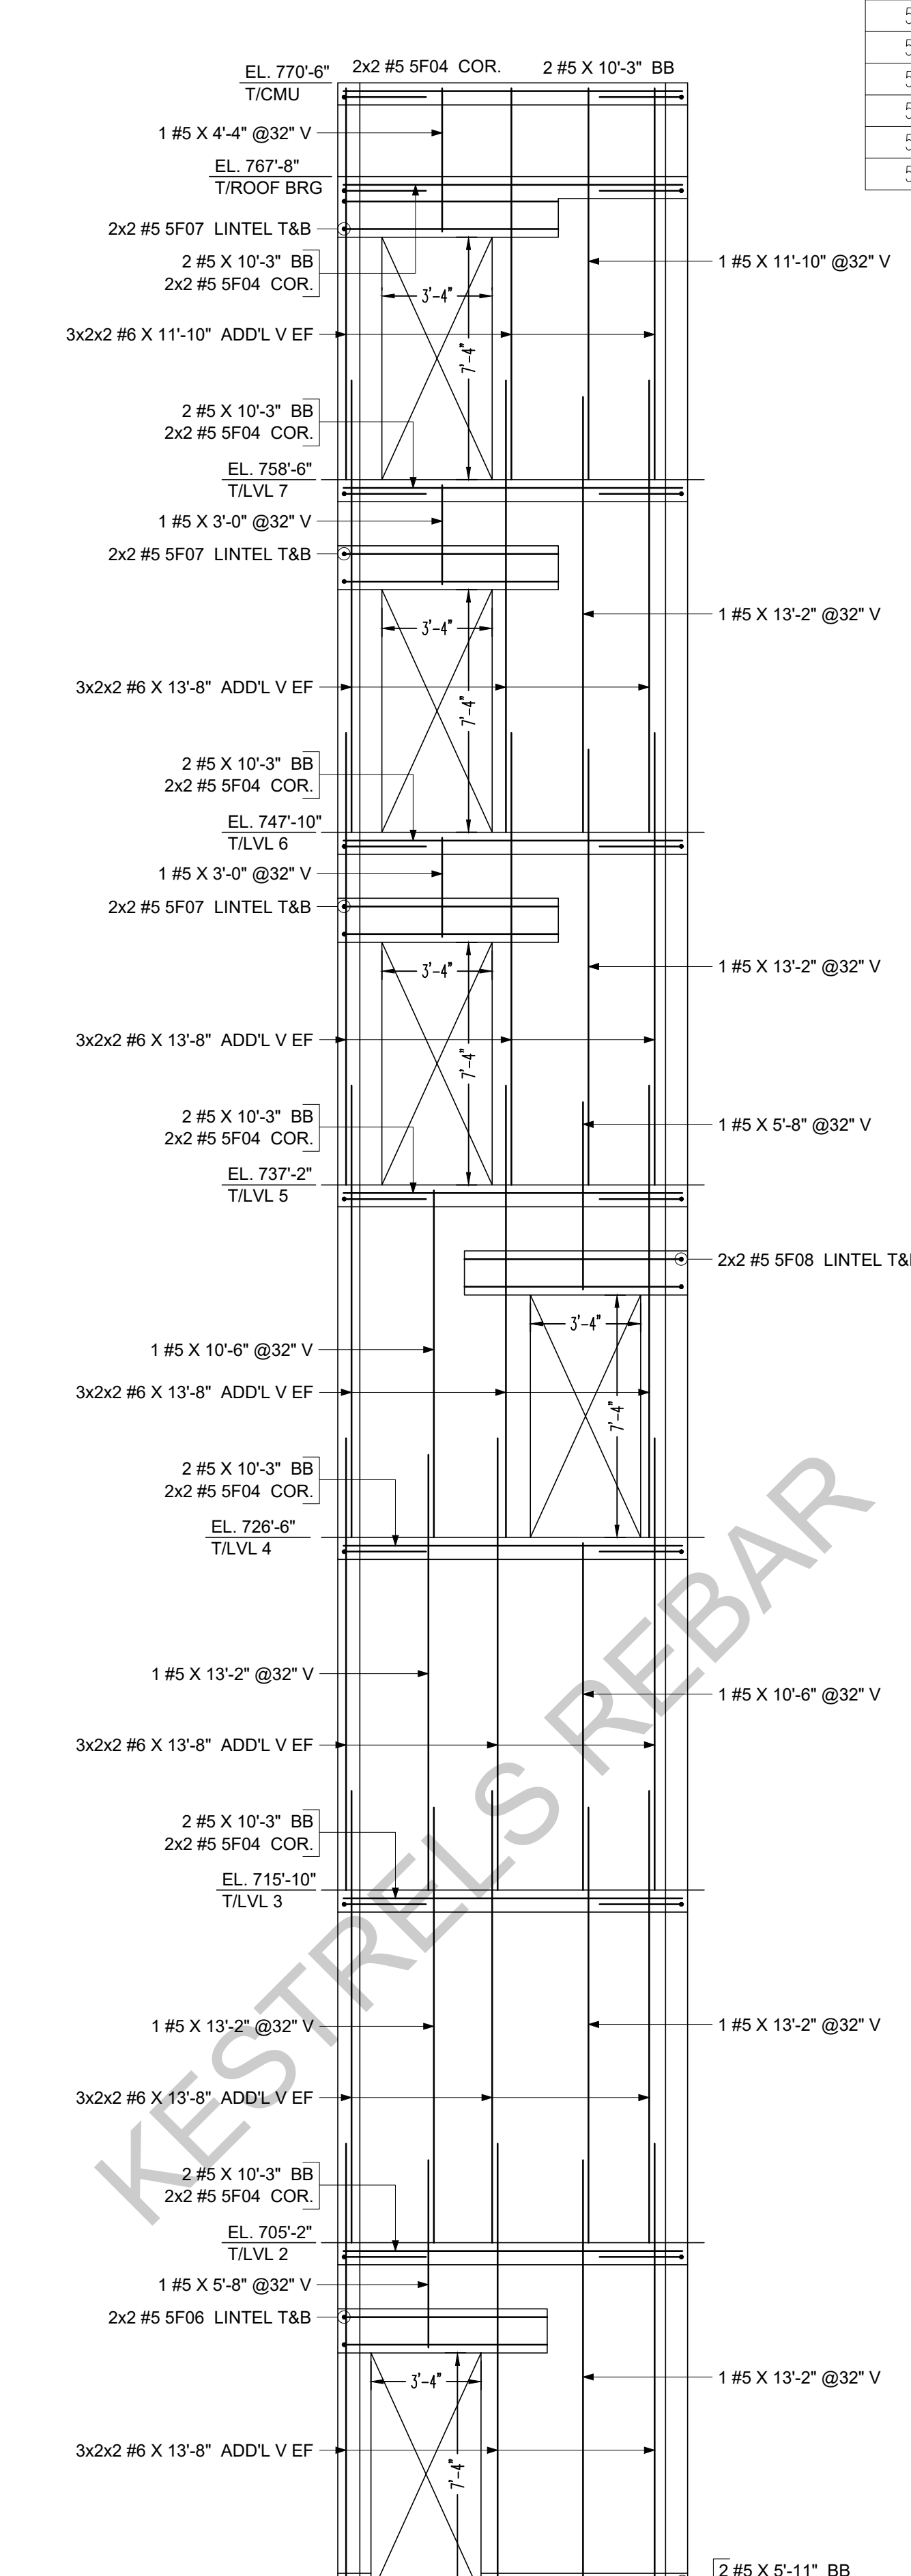

ELEVATION E
SCALE: 1/4" = 1'-0"
REF: S2.01e, A2.01e, S4.20 & A7.05